

INDIG® NXT

iF0900 Ice Cube Machine

Model: IRF-0900A IYF-0900A IDF-0900W IDF-0900N IDF-0900A IRF-0900W IYF-0900W IYF-0900N



Designed for operators who know that ice is critical to their business, the Indigo®NXT Series ice machine's preventative diagnostics continually monitor itself for reliable ice production. Improvements in cleanability and programmability make your ice machine easy to own and less expensive to

- easyTouch® Display- New icon based touch screen takes the guess work out of owning and operating an ice machine.
- Programmable Ice Production Now its super easy to program your ice machine to be off at certain times of the day to save money with fluctuating electrical rates. Also programmable by daily ice production volume.
- Easy to Clean Foodzone Hinged front door swings out for easy access. Removable water-trough, distribution tube, curtain, and sensing probes for fast and efficient cleaning. Select components made with AlphaSan® antimicrobial.
- Intelligent Diagnostics provide 24 hour preventative maintenance and diagnostic feedback for trouble free operation.
- Acoustical Ice Sensing Probe Unique patented technology allows for reliable operation in challenging water conditions and environments.
- **DuraTech™ Exterior** provides superior corrosion resistant above stainless steel. Innovative clear-coat resists fingerprints and dirt making it easier to keep clean.
- Avaiable LuminIce II Growth Inhibitor- Controls the growth of bacteria and yeast with the food zone keep the machine cleaner longer. A new indicator in the display keeps you abreast of the operational status.

Specifications

BTU Per Hour:

12,700 (average) 14,800 (peak)

Refrigerant:

R-404A CFC-free

Operating Limits:

Ambient Temperature Range:

40 to 100 F (4.4 to 43.3 C)

Water Temperature Range: 40 to 90 F (4.4 to 32.2 C)

Water Pressure Ice Maker Water In:

Min. 20 psi (137.9 kPA) Max. 80 psi (551.1 kPA)

Ice Machine Electric

208-230/60/1

(208-230/60/3 and 230/50/1 also available)

Minimum circuit ampacity:

Air-cooled: 12.2 1ph 9.7 3ph Water-cooled: 11.2 1ph 8.7 3ph Remote: 12.2 1ph 9.7 3ph

Maximum fuse size:

Air-cooled: 20 1ph 15 3ph 15 3ph Water-cooled: 20 1ph Remote: 20 1ph 15 3ph



Ice Shape



Half Dice 3/8" x 11/8" x 7/8" (.95 x 2.86 x 2.22 cm)



Dice ½" x ½" x ½" (2.22 x 2.22 x 2.22 cm)



Regular 1½" x 1½" x ½" (2.86 x 2.86 x 2.22 cm)














COMPANY WITH QUALITY SYSTEM




Tel: 1 920 682 0161 Fax: 1.920.683.7589

www.manitowocice.com







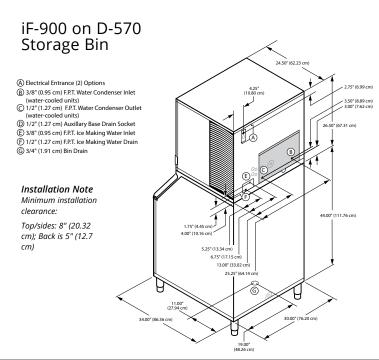

Space-Saving Designs





iF-900 iF-900 D-570 D-970 76.50" Height 76.50" 194.30 cm 194.30 cm 30.00" 76.20 cm 30.00" 76.20 cm Width 34.00" 34.00" Depth 86.30 cm 86.30 cm 365 lbs. 543 lbs. Bin 165.7 kgs Storage 241.1 kgs

Height includes adjustable bin legs 6.00" to 8.00", (15.24 to 20.32 cm) set at 6.00" (15.24 cm).
Bin capacity is based on 90% of the volume x 33 lbs/ft3 average density of ice

Specifications

| | | Ice Production 24 Hours | | | | Power Usage kWh/100 lbs.@90°Air/70°F | | Water Usage/100 lbs. 45.4 kgs. of Ice | | | |
|-------------------|--|-------------------------|--------------------|--------|--------------------|---|------|--|---------------|--------|-----------------|
| | Model | Ice Shape | 70°Air/ 50°F Water | | 90°Air/ 70°F Water | | 1 Ph | 3 Ph | Potable Water | | ENERGY STAR* |
| AIR-COOLED | IRF-0900A | regular 🖣 | 797 lbs | 362 kg | 639 lbs | 290 kg | 5.33 | | 19 Gal. | 71.9 L | NA |
| | IDF-0900A | dice 🖱 | 874 lbs | 396 kg | 664 lbs | 301 kg | 5.10 | 5.10 | 19 Gal. | 71.9 L | NA |
| | IYF-0900A | half-dice | 901 lbs | 409 kg | 710 lbs | 322 kg | 5.02 | 5.02 | 19 Gal. | 71.9 L | NA |
| WATER-COOLED | IRF-0900W | regular 🧶 | 773 lbs | 351 kg | 683 lbs | 310 kg | 4.32 | | 19 Gal. | 71.9 L | NA |
| | IDF-0900W | dice 🕮 | 839 lbs | 381 kg | 701 lbs | 318 kg | 4.35 | 4.35 | 19 Gal. | 71.9 L | NA |
| | IYF-0900W | half-dice | 879 lbs | 399 kg | 786 lbs | 357 kg | 4.04 | 4.04 | 19 Gal. | 71.9 L | NA |
| /M | * Water-cooled Condenser Water Usage / 100 lbs. /45.4 kgs. Of Ice: 145 gal / 549 L . * Water-cooled models are excluded from ENERGY STAR qualification. | | | | | | | | | | |
| REMOTE- COOLED | IDF-0900N | dice 🕮 | 821 lbs | 372 kg | 720 lbs | 327 kg | 4.91 | 4.91 | 19 Gal. | 71.9 L | * |
| | IYF-0900N | half-dice | 855 lbs | 388 kg | 745 lbs | 338 kg | 4.90 | 4.90 | 19 Gal. | 71.9 L | NA |

Order ice storage bin separately. Ice storage bin and JCF900 remote condenser must be ordered separately. Consult remote condenser specification sheet for details.

Accessories

LuminIce® II Growth Inhibitor

reduces yeast and bacteria growth for a cleaner ice machine.



External Scoop holder

Protect the ice scoop with the NSF approved versatile scoop holder.



Arctic Pure® Water Filters

Reduces sediment and chlorine odors for better tasting ice.



iAuCS®

schedules and performs routine ice machine cleaning automatically.



